





<u>Ashima</u>"

Add No. 176 Bao Bu Road, Bao Bu Li Changhua 50089 Taiwan R.O.C. Tel:886-4-7260496 Fax:886-4-7260638 E-mail:ashima.twn@msa.hinet.net



Our passion for riding and our dedication to engineering excellence mean that Ashima has built a design philosophy that we live daily. Freedom at Ashima means the freedom to innovate, create and push the boundaries in bicycle braking technology. Over 300 world wide Patents in 14 years show our clear commitment to bringing the most up to date solutions to riders the world over. Whether the stimulus is the OEM/ODM aftermarket or a brand seeking a new product line, Ashima's approach and R+D capabilities deliver products imbued with a fresh outlook backed by proven technical expertise.



CONTENTS

INTRODUCTION P.01 **BRAKING PRODUCTS** DISC ROTORS P.03 ~09 Standard Rotors **AiROTOR** Ai2 **AINEON AEGIS New Disc** Flo-tor Centerlock Adaptors Boost Hub Adaptors Disc Brake Caliper Adaptors Centerlock Rotors Rotor Bolts P.10~18 **DISC BRAKE PADS** Compound Selection Multi-Compound Disc Brake Pads Standard Disc Brake Pads P.19~27 **BRAKE SHOES** Compound Selection Brake cartridge Selection Pad Style 4 Function In 1 Brake Pads Shimano Direct Mount Standard Range 35, 36, 45, 46, 47, 48, 50 Advanced Range 65, 66, 68 Pro Range 72, 73, 75, 76 **HOSE & CABLE** P.28~40 Hvdraulic Hose Hose: Kit Box Inner Wire: Header Card Inner Wire: Work-Shop Box Outer Casing: Work-Shop Box Outer Casing: Zip Bag Outer Casing: Kit Box Accessories

RITE TOOLZ

P.41~46

Hydraulic End Fittings Bleeding Accessories Bleeding Kit

Cycle Computer Mount

DISC ROTOR STANDARD ROTORS

Our Standard Rotors are all made of High Grade stainless steel SUS410, and designed to provide consistent braking whilst dissipating dirt. Single-Piece Construction Standard Rotors available in a range of sizes to suit most kind of riding style.



ARO-01

- High Grade stainless steel SUS410
- Single-Piece Construction
- High Efficacy at dissipating Heat and Dirt
- Beyond ISO Standard

Options / ARO-01

Part No.	Weight
ARO-01-160	140g
ARO-01-180	173g
ARO-01-203	200g

A,RoToR



ASHIMA technology taken to the limit! Single-Piece Construction with Extreme Low Mass, AiRotor, heat-up more than heavier rotors which may adversely impact some low spec systems during prolonged braking events. However, conversely due to the extreme low mass they also cool fast, so with proper / normal braking consideration the heating / cooling effect can be balanced.













ARO-08

ARO-09

- High Grade stainless steel SUS410
- Single-Piece Construction with Extreme Lightweight design
- High Efficacy at dissipating Heat and Dirt
- Beyond ISO Standard
- Ground and Hardened to 42 HRC

Options / ARO-08

Part No.	Weight
ARO-08-140-XX	68g
ARO-08-160-XX	85g
ARO-08-180-XX	112g
ARO-08-185-XX	113g
ARO-08-203-XX	136g

Options / ARO-09

Part No.	Weight
ARO-09-140-XX	64g
ARO-09-160-XX	73g
ARO-09-180-XX	104g

XX=Color Option Plain BK RD GD BU WH

IMINEQN

ASHIMA technology taken to the limit! AiNEON TWO-Piece Construction Rotors, Alloy Carriers are made of Aerospace materials and combined with High Grade Stainless Steel Braking Band. Exceptional Heat Dissipation from the braking annulus, due to the high thermal conduction of the Alloy Carrier











ARO-10

- Alloy Carrier: Aerospace 7075-T6 Heat treated
- Braking Band: High Grade stainless steel SUS410, Ground and Hardened to 42 HRC
- Two-Piece Construction with Extreme Lightweight
- High Efficacy at dissipating Heat and Dirt
- With 6 pcs of 7075 Alloy Bolts
- Beyond ISO Standard


Options / ARO-10

Part No.	Weight
ARO-10-140-XX	67g
ARO-10-160-XX	78.5g
ARO-10-180-XX	101g

XX=Color Option BK RD GD BU









IAEGIS

of color finish.

ASHIMA new Single-Piece Construction Rotors

are manufactured to High Performance in both

Heat and Dirt dissipation. Available on a range



XX=Color Option Plain BK RD GD BU WH

High Grade stainless steel SUS410

Beyond ISO Standard

Options / ARO-15

ARO-15-160-XX

ARO-15-180-XX

ARO-15-200-XX

ARO-15-203-XX

Part No.

• High Efficacy at dissipating Heat and Dirt

• Single-Piece Construction with Lightweight design

Weight

91g

116g

147a

149g







• Alloy Carrier: Aerospace 7075-T6 Heat treated

ARO-18-180-XX

- Braking Band: High Grade stainless steel SUS410
- · High Efficacy at dissipating Heat and Dirt
- With 6 pcs of steel Bolts

ARO-18

Beyond ISO Standard

Options / ARO-18

Part No.	Weight
ARO-18-140-XX	77g
ARO-18-160-XX	97g
ARO-18-180-XX	126g
ARO-18-203-XX	158g

XX=Color Option BK RD

- High Grade stainless steel SUS410
- Single-Piece Construction
- High Efficacy at dissipating Heat and Dirt
- Beyond ISO Standard

Options / ARO-19

Part No.	Weight
ARO-19-140-XX	79g
ARO-19-160-XX	106g
ARO-19-180-XX	135g
ARO-19-203-XX	171g

XX=Color Option Plain BK RD GD BU WH











I Flo-tor

Ashima Two-Piece Construction Floating Rotors provide better brake force, rapid heat dissipation and brake pads wear evenly.

The special design rivets offer space between outer ring and inner ring of the rotor for reducing the deformation caused by heat conduction.

Two-Piece floating rotor delivers consistent braking performance for better control and confidence in race conditions.

- Alloy Carrier: Aerospace 7075-T6 Heat treated
- Braking Band: High Grade stainless steel SUS410
- High Performance Floating Rotor
- High Efficacy at dissipating Heat and Dirt
- Beyond ISO Standard




ARF-1-203-XX

ARF-1

Options / ARF-1

Part No.	Weight
ARF-1-160-XX	105g
ARF-1-180-XX	135g
ARF-1-203-XX	180g





ARF-2-180-XX

ARF-2-140-XX

ARF-2

Options / ARF-2

Part No.	Weight
ARF-2-140-XX	71g
ARF-2-160-XX	88g
ARF-2-180-XX	111g
ARF-2-203-XX	145g



ARF-3

Options / ARF-3

Part No.	Weight
ARF-3-160-XX	91g
ARF-3-180-XX	114g
ARF-3-203-XX	151g





ARF-2S-160-BK

ARF-2S

Options / ARF-2S

Part No.	Weight
ARF-2S-160-BK	88g

CENTER-LOCK ROTOR

Not only 6-bolt rotor option but also Ashima new centerlock two-piece construction rotors. Centerlock rotors are generally easier and more error proof to install.

- Alloy Carrier: 7075-T6 Heat treated
- Braking Band: High Grade stainless steel SUS410, Ground and Hardened to 42 HRC
- High efficacy at dissipating heat and dirt









ARO-18C-140-BK

ARO-18C-160-BK

ARO-18C-180-BK

Ashima also provides economical centerlock rotors.

- Two-Piece Construction with center lock rotor
- Braking Band: High Grade stainless steel SUS410 for outer rotor and iron for inner rotor.
- Ground and Hardened to 42 HRC
- Steel Carrier
- · Good efficacy at dissipating heat and dirt

ARO-18CT









ARO-18CT-140-BK

ARO-18CT-160-BK


ARO-18CT-180-BK

ARO-18CT-203-BK

Advanced centerlock rotors & Floating center lock rotor

- Alloy Carrier: 6061-T6 Heat treated
- Beyond ISO Standard
- Averagely dispersed the shear force.
- · Easy assembling and not easy to swinging.









ARF-1C-160-BK

E-BIKE ROTOR

International standard 6 bolt rotor which suitable for E-bike Wide range of friction area to increasing brake performance. Ultimate strength, brilliant toughness, superior heat dissipation. Thickness of 2.0mm

ARO-27





ARO-27-203



ARO-27-180

ARO-27-220

CENTER-LOCK E-BIKE ROTOR

Two-Piece construction with center lock rotor.

Braking Band: High Grade stainless steel SUS410 for outer rotor and iron for inner rotor. Moreover, rotor performance high efficacy at dissipating heat and dirt. Thickness of 2.0mm

ARO-28CT







ARO-28CT-180-BK

ARO-28CT-203-BK

ARO-28CT-220-BK

ROTOR BOLTS

Rotor Bolts

Ashima Part No	Material	Torx	Weight (g) / per pack	QTY
AA-RB-TI-SI	Titanium	T25	7	6
AA-RB-AL-XX	Aluminum 7075	T20	4.5	6
AA-RB-ST-XX	Steel 10B21	T25	24.5	12

XX-Color Option: SI BK RD GD BU










■ DISC BRAKE CALIPER ADAPTOR

Requirement Made Clear











AU5-X

AU0-X

Allows PM Caliper to fit IS fork / Frame

AU1-X Allows IS Caliper to fit IS fork / Frame

AU2-X Allows IS Caliper to fit PM fork / Frame

AU3-X Allows PM Caliper to fit PM fork / Frame

AU4-X Allows PM Caliper to fit FM fork / Frame

Allows FM Caliper to fit FM fork / Frame

POST MOUNT

Rotor Diameter	Ø140	Ø160	Ø180	Ø203	Ø220
Fork					
IS		AU01	AU03	AU05	
PM 160		Direct	AU31	AU32	
PM 180			Direct		AU34
PM 203				Direct	AU35
PM 220					Direct
FM	AU41	AU43			
Frame					
IS	AU01	AU02	AU04	AU06	
PM 160		Direct	AU31	AU32	
PM 180			Direct		AU34
PM 203				Direct	AU35
PM 220					Direct
FM	AU42	AU44			

FLAT MOUNT

Rotor Diameter	Ø140	Ø160	Ø180	Ø203	Ø220
Fork					
FM (140/160)	AU51	AU51			
FM (160/180)		AU53	AU53		
Frame					
FM (140/160)	Direct	AU52			
FM (160/180)		Direct	AU54		





















AU31



AU11



AU41

AU21

AU42





AU34







AA-RB-TI-SI

07

AA-RB-AL-XX

AA-RB-ST-XX

CENTERLOCK ADAPTOR

Centerlock Hub to 6-Bolt Rotor Adaptor







AC02-XX

AC03-2-XX

AC05-1-BK

Options

Part No.	Axle Size (mm)	Weight
AC02-XX	9/10/12	23g
AC03-2-XX	9/10/12/15/20	25g
AC05-1-BK	9/10/12/15/20	24g

XX-Color Option: SI BK RD GD BU







BOOST HUB ADAPTOR

Boost Hub Adaptors allow users adapts 15x100mm front wheel (Hub) and 12x142mm Rear Wheel (Hub) to fit new Boost 15x110mm Boost Standard Fork and 12*148mm Boost Type frame.

AH-BS5-BK

Front Hub: 15mm*100mm Front Fork: 15mm*110mm Thickness: 5mm Material: 6061 Alloy

AH-BS3-BK

Front Hub: 12mm*142mm Front Fork: 12mm*148mm Thickness: 3mm Material: 6061 Alloy



Options

Part No.	Front & Rear	Wheel(Hub) Size	Fork Size	Weight
AH-BS5-BK	Front	15mm*100mm	15mm*110mm	26.5g
AH-BS3-BK	Rear	12mm*142mm	12mm*148mm	22.1g

DISC BRAKE PADS

COMPOUND SELECTION




Compound Type	Braking Characteristics						
Compound Type	Short term "cold"	Disc wear	Pad wear	Wet	Long term "hot"	Noise	
OR: Organic <30% Metal	Excellent	Excellent	Moderate	Moderate	Poor	Excellent	
SM: Semi Metal >30<60 % Metal	Very Good	Good	Very Good	Very Good	Good	Good	
SI: Sintered >60 % Metal	Moderate	Moderate	Excellent	Excellent	Excellent	Moderate	
CE: Ceramic >30<60 % Metal	Very Good	Good	Excellent	Excellent	Good	Moderate	
MC: Multi Comp. (SOS) SI-OR-SI	Very Good	Good	Excellent	Excellent	Excellent	Good	


■ MULTI-COMPOUND DISC BRAKE PADS



25 PR/BOX Workshop Box Package is available for every model.

- ☐ Exceptional high temperature performance
- ☐ Exceptional low temperature/short term braking performance
- ☐ Exceptional wet performance
- ☐ Reduced heat generation due to smaller sintered area
- Reduced heat transfer due to organic material over piston contact area
- ☐ Exceptional pad wear (pad wears at the rate of thesintered compound)
- ☐ Very Good noise characteristics
- ☐ Good Disc wear due to reduced sintered area In short, SOS is the professional choice for all rides





STANDARD DISC BRAKE PADS

SHIMANO 01



- AD 0101 OR SM CE SI MO
- Shimano XT BR-M755, GRIMECA SYSTEM 8
- SRAM Mechanical 9.0
- Hope Mono M4: Tech M4: Stealth Race E4: Tech4 E4
- Promax DSK-922m / 922T / 930 / 930M / 930T, LUCID P4
- Trickstuff The Cleg DH, 4, C41, DIRETTISSIMA.



- AD 0104 OR SM CE SI MO
- Shimano XTR BR-(M965 / M966 / M975 / M975P); Deore XT BR-(M765 / M775 / M776); SLX BR-M665; Deore BR-(M535 / M595 / M596); Saint BR-M800; Hone BR-M601; Deore LX BR-(M585 / T605 / T665); Alfine BR-(S500 / S501); BR-(M545 / R505 / T605)
- TRP Dash Carbon, Parabox, Juin tech R1 / X1.




- AD 0102 OR SM CE SI MC
- Shimano Deore BR-(M3050 / M315 / M355 / M365 / M375 / M395 / M415 / M416 / M416A / 4050 / M445 / M446 / M447 / M465 / M475 / M485 / M486 / M495 / M505 / M515 / M515LA / M525 / M575 / T615); Deore LX BR-T675; Tourney TX BR-TX805; Metrea BR-UR300; Nexave BR-(C501 / C601); BR-(MT500 / MT400 / MT200)
- Tektro Aquila MD-M500; Auriga HD-(M285 / M286 / M290 / M291 / M700 / T530 / T525 / T520 / E530 / E525 / E520 / E500); Draco HD-(M350 / M351 / M352 / C605 / C605slc / MD-C550 slc / C610 / C610slc / 610C / C705 / 705C / C710 / 710C / C800 / C801 / C811 / M600 / M802 / G-spec fmr R802 rear / spyke / eu810rear / eu811rear); Orion HD-(M740 / M730 / M725 / M720); Gemini HD-(M520 / M521 / M500 / M501 / M510); HDC330 HD-(M330 / M301 / M300 / M280); Aries MD-M300; Mira MD-C400; Volans HD-T710; Vela HD-(T290 / T285); Dorado HD-E715
- Promax DSK-(927T / 936 / 926 / 925 / 923 / 920 / 920m / 920T / 915 / 718R)
- TRP Hylex; HY / RD; Spyre SLC Spyre; Spyke; Dash Sport
- Giant MPH Root





• Shimano Deore; Naxave BR-M555 hydraulic



AD 0105 OR SM CE SI


- Shimano XTR BR-M9120: XT BR-M8120, BR-M8020: SLX BR-M7120 DEORE BR-M6120, BR-MT420; SAINT BR-M820, BR-M810; ZEE BR-M640; BR-MT520; D02S, N03A,
- TRP Quadiem; Quadiem Spec / SL; Slate T4 / G-spec / G-Spec dh / G-spec dh-r / G-Spec trail SLC / G-spec-trail s / E-zurich 2.3 / E-zurich 2.3 comp / E-zurich comp / Dorado 4P HD-E730 / E725 / E720 / M735 / M745 / 750 / Orion 4P / M841 / 840-2 / 830 / 826 / 825 / 815 / E-840-2 / E820 / E822 / EU820 / EU821; Juin tech gt / gtp / gtf / Q10RS



AD 0106 OR SM CE SI MG



- Shimano XTR BR-(M9000 / M9020 / M987 / M988 / M985 / M978); Deore XT BR-(M8100 / M8000 / M785); SLX BR-(M7100 / M7000 / M675 / M666); DEORE BR-(M6100 / M6000 / M615); Alfine BR-(S7000 / S700); BR-(RS785 / R785 / CX77 / CX75 / R517 / R515 / R315 / R317); G04S
- FSA K-Force DB-TX-9000; Afterburner DB-TX-9150
- REVER MCX1 Post Mount
- TEKTRO HD-7910
- Riderever Arc / Arc-s / Arc-u / Arc-e / attack-s / attack-u / attack-e
- Clarks M2



• Shimano Dura Ace BR-R9270, BR-R9170; Ultegra BR-R8170, BR-R8070; 105 BR-R7070; Tiagra BR-4770: GRX BR-RX810. BR-RX400: XTR BR-M9100, BR-M9110; XT BR-M8110; SLX BR-M7110; Metrea BR-U5000; BR-(RS305-R / R305-F / RS405F / RS405R / RS505 / RS805 / R510 / R310 / TT T910 / UR300 / S7000)

- Tektro HD-(R350 / R310); R802front / EU810front / EU811front
- Riderever attack-s(FM) / attack-u(FM) / mcx2
- TRP HD-T910
- REVER MCX1 Flat Mount





• Magura Marta; Marta SL 2002-2008; Marta Gold; Clark Skeletal

AD 0205 OR SM CE SI MG

MAGURA 02



AD 0201



• Magura Louise 1999-2001; Clara ~2000



AD 0202 OR (SM) (SI) • Magura Julie 2001-2008



AD 0203 OR SM SI

- Magura Clara 2001-2002; Louise Louise 2002-2006; Louise FR 2002-2006
- Promax DSK-903





- Magura Louise 2007-2010; Marta 2009; Louise Bat: Louise Carbon: Julie HP2009
- Brake Force One BFO Brake







- Magura MTS / MT2 / MT4 / MT4e / MT4eStop / MT4 flatmount / MT6 / MT6 HC / MT8 / MT8 SL / MT8 pro / MT8 SL flatmount / MT sport / MT Trail sport(rear) / MT Trail SL(rear)
- Campagnolog Super Record EPS / Super Record / Record EPS / Record / Chous / Potenza








• Magura MT5 / MT5e / MT Trail sport (front)



AD 0210 SM

• Magura MT / A2






- Hope C2/O2; Open 2
- Giant MPH 2000



AD 0302 SM SI

• Hope 2004 Mono Mini ; 2002 Mono Mini



AD 0303 OR SM

• Hope DH4 / E4 / M4





• Hope Mono 6 TI; Moto M6; 2007 Mono 6





• Hope Mono Trail; Tech 3 Trial Zone; Trail Zone; Mini Trails



AD 0308 SM SI

• Hope Moto V2



 Hope Tech Evo (X2 / V2 / X2); Tech 3 X2 Uno; Mini (X2 / Pro); Race (EVO X2 / X2)



• Hope Tech 3 (V4 / X2 Uno); Tech Evo



AD 0311 SM

AD 0310 SM

• Hope Tech 3 E4 / Race Evo E4 / Hope E4 / Stealth Race E4 / Tech M4 / RX4-SH / RX4+ brake

FORMULA 04



AD 0402 SM SI MC

• Formula B4 (Extreme / Team / Pro / Pro+ / SL / SL+); 4 Racing XC; Extreme (FR / DH / BR / Team / Pro / SL), GRIMECA 13



• Formula ORO / K18 / K24




 Formula Mega; RO Racing; T1 Racing; R1 Racing; The one; R1 / FR / RX / RO / T1 / C1 / CR3 / RR1 / CURA series / CURA-E



AD 0405 OR SM SI CE

• Formula Cura 4

HAYES 05



- AD 0501 OR SM CE SI MO
- Hayes HFX Mag / Plus / XC / HD / 9 Carbon / 9XC / 9HD / MX1; HFX-9 hydr; +mech
- Promax hydraulic





- Hayes GX-2; MX-(2/3/4/5), Sole, CX pro (comp / exper) / QUAD (QHD-4/5/SP)
- Promax DSK-810
- Cannondale Helix 6
- Bengal ares & MB series / strida / Helix 1~7.5 (not including Helix 4X / 7B / Ares pro / 5)



• Hayes El Camino; El trail hydraulic

SP0503

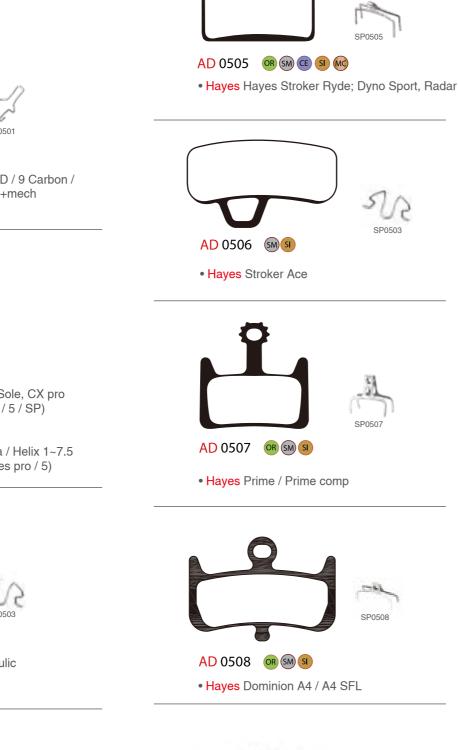



DIATECH 66


AD 0602 SM

- Dia-tech Anchor / Armor
- Promax DSK-901

AVID 07



- AD 0701 OR SM CE SI MC
- Avid Juicy (carbon/3/5/7/ultimate); BB7 mechanical
- Promax DSK-950



- AD 0702 OR SM CE SI
- Avid BB3 / BB5 Mechanical
- Promax DC-(710 / 720 / 913); DSK-(710 / 717R / 717 / 300 / 300R / 310 / 330R); Render; Render R
- Clarks CMD17



AD 0703 OR SM CE SI MC

Avid CODE 4-piston; Code (2008-2010);
 Code (5/7)





- AD 0704 OR SM CE SI MO
- Avid Elixir (1/3/5/7/9/R/CR)
- SRAM Code; XX; XO; XO trail; DB (5 / 3 / 1); Level TL; T; Level
- Trickstuff C21



- AD 0705 OR SM CE SI
- Avid Code R; CODE (2011-2014)
- SRAM Code (RSC/R); Guide RE / DB8



- AD 0706 OR SM CE SI
- Avid XO Trail; Elixir (7 Trail / 9 Trail 4-piston)
- SRAM Guide (Ultimate / RSC / RS / R / T), G2 Ultimate



- AD 0707 OR SM CE SI
- Avid Road RED
- SRAM Road RED / HRD, eTap HRD, Level Ultimate / TLM/Force1 / CX1 / Force / Rival 1 / Rival 22 / S-700/LevelTLM, Hydro R



 Avid (DB1 / DB3 / DB5 / TL / T / Level hydraulic / Force 2020) Hydraulic

15

• Hayes Stroker (Trail / Carbon / Gram)

AD 0504 OR SM SI



• SRAM Maven 4-Piston







• Tektro (Aquila / IO); Novela (PRE 2010) Hydraulic / Mechanical



AD 0802 OR SM CE

• Tektro Lyra MD-C500 / IOX / Novela 2011 / Novela MD-M311



• Tektro E-Bike Dorado HD-E710

17

RST 09



AD 0901 OR SM

• RST mechanical

ZOOM 10



- Zoom mechanical disc brakes, DB-(250 / 350 / 450 / 550)
- Alhonga SNG MECHANICAL
- Clarks CMD-21

LOGAN 11



AD 1201 SM

• Logan DX 2001 / 2002

SR SUNTOUR 12





AD 1301 SM


- SR SUNTOUR DB XCC-MC Mechanical
- Tektro SUB; e-sub; Twin; Volans
- TRP Parabox 2011 Rear



AD 1302 SM

• SR Suntour DB XCC-HD hydraulic

PROMAX 13



AD 1401 OR SM CE

• Promax DSK-(200 / 200S / 400 / 400E / 400S / 420 / 610 / 650) mechanical (pad in 4mm / out 5.5mm); DSK-320 / 700 mechanical (pad both in 4mm)

CAMPAGNOLOG 14





AD 1701 OR SM SI

• Campagnolog Super Record EPS / Super Record / Record EPS / Record / Chous / Potenza

BRAKE SHOES

COMPOUND SELECTION

ASHIMA offers a wide range of specific compounds, which offer outstanding performance on all types of rims.

CARBON RIM COMPATIBLE

Pro-Carbon Compound: CA1

The newly developed compound is the best solution for Carbon rims. Excellent performance under both wet and dry conditions. Outstanding rim protection by its low operation temperature. And also, reinforced pad wear is the main improvement of CA1 compound.

Pro-Cac: PCac

Specifically for carbon rims that are prone to thermal distortion on long decents. As the name suggests Pro. is for professional riders that require ultimate stopping power whatever the conditions. Unlike traditional pads when things get hot Pro just bites harder. Wet performance is up a staggering compared to standard

Advanced Carbon Compound: CA

Developing rim specific compounds for selected OEMs ASHIMA has gained the necessary knowledge to allowyear on year improvements, the result is a CRM (CorkRubber Matrix) that excels in wet/dry condition whist being rim friendly.





AR45R-P-CA1

ALLOY RIM COMPATIBLE

Pro G: PG

For alloy rims as the name suggests Pro. is for professional riders that require ultimate stopping power whatever the conditions. Unlike traditional pads when things get hot Pro just bites harder. Wet performance is up a staggering compared to standard compounds.

Advanced Alloy Compound: All

This is an outstanding compound that gives excellent performance on all alloy rims, giving market leading performance on both dry/wet conditions. This is universally considered as the ideal all round performance and selected by all after-market brands which ASHIMA supply.

Comp-Trial Compound: CT

ASHIMA has developed a range of super sticky compounds specifically for trails use where you needs huge amounts of stopping power instantaneously, for this compound pad wear/noise take fourth place for the characteristics profile following performance, performance, and perfor-











ARS66-P-AL AP68R-P-AL

AB48V-P-CT

AB50CV-P-MH-CT

CERAMIC RIM COMPATIBLE

Pro-Ceramic: CE

Simply the best compound for ceramic rims, if you ride ceramic rims then the only compound you'll want to use is the ASHIMA Pro-Ceramic.



E-BIKE COMPATIBLE

Pro E-Bike Compound: **EA**

Instead of making the brake pad larger, ASHIMA develop this E-bike compound by its up-to-date technology. Specially developed EA compound is suit E-bike, Heavy Bike, and Cargo bikes with extra stopping power, and longer pad wear.



PAD STYLE

EBS Pad Feature Summary: by pad style

EBS FEATURES			3			— «	0		5 C
Pad Range	Water Remove	ANTI- Squeal	Crud Remove	Max Brake Area	Plough Feature	Air Flow Cooling	Wear dot Indication	Rubber Plastic Matrix	Wide Rim 23-28 mm
45	-	-	-	-	-	-	-	-	-
46	-	-	-	-	-	-	-	-	V
66	V	V	-	-	-	-	-	-	-
65	V	V	V	-	-	-	-	-	-
68	V	V	V	V	V	-	-	-	-
72	V	V	V	V	V	V	V	-	-
73	V	V	V	V	V	V	V	V	-
75	V	V	V	V	-	V	V	-	-
76	V	V	V	V	-	V	V	-	V

4 FUNCTION IN 1 BRAKE PADS

SHIM	ANO	CAMPAG	GNOLO
STANDARD MOUNT	DIRECT MOUNT	STANDARD MOUNT	DIRECT MOUNT
1	3	The same of the sa	2

4 in 1 Brake pad Pad Length 54 mm



The pad is compatible with 4 different shoes as shown above.

The surface design provides excellent braking performance, and is suitable for all weather use.



ARS 45RB-P-AL

ARS 46RB-P-AL

ARS 73RB-P-AL

ARS 75RB-P-PCAC

STANDARD RANGE 35 36 45 46 47 48 50 : Unrivalled value

High performance value pad with minimum EBS technology: Brake surface offers all round functionality and acts as a direct equivalent replacement for most OEM pads. This range is aimed at casual infrequent riders for whom economy is the primary concern. Available for all MTB and road systems





MTBPad Length 55 mm























AP 50CV-P-MH-AL



■ TRIALS / BMX

For those who demand short bursts of instant stopping power, giving the ability to achieve phenomenal weight shifts from one wheel to the other in a fraction of a second, allowing the rider greater control over the bike, necessary to perform near impossible tricks or to take on the most demanding of obstacles. A range of pads designed to specifically bring out the best performance of the Magura hydraulic rim brakes, V/cantilever and U brakes.





Pad Length 50 mm

AB 48V-P-CT

21

AB 50CV-P-MH-CT

45

ROAD (Shimano - Direct Mount) Pad Length 54 mm OP.: CA PCac CA1 AL PG CE



ROAD (Shimano - Standard Mount) Pad Length 54 mm









ARS 45CR-P-HU-AL

ARS 45CR-P-H-AL

ARS 45CR-P-M-AL

ARS 45CR-P-S-AL

ARS 45CV-P-S-AL Pad length 53 mm MINI VELO

ROAD (Campy) Pad Length 54 mm









ARC 45CR-P-HU-AL


ARC 45CR-P-H-AL



ADVANCED RANGE 65 For serious off road performance(Pat.)

Ashima mid-range EBS pad. Braking surface has been broken down into three key areas each with a specific function:


- Crud Clean: Cutting features to remove the heavy contaminates
- Max Brake & Water Remove: Like a car tire tread water is removed from the contact surface to improve performance
- Rim Release: Anti squeal design eliminates noise and the need to set "toe-in"
- This pad is aimed at the more serious weekend rider who likes to get a little dirty, where performance, especially in the mud & crud is a prerequisite.



MTB Pad Length 72 mm OP. : AL PG EA



ADVANCED RANGE 66 For outstanding performance (Pat.)




Ashima entry level EBS pad, with advanced groove profile: inspired by a car tire tread the central channel that runs the entire length of the brake surface, ensures contaminates have a low pressure escape route away from the brake/rim interface, giving superior wet performance.

Exit channels are angled in the direction of rim travel making it easier to remove the contaminants from the brake. This range is targeted at more frequent bike riders and ideal for the commuter where performance is more of a concern.


ROAD (Shimano - Direct Mount) Pad Length 50 mm



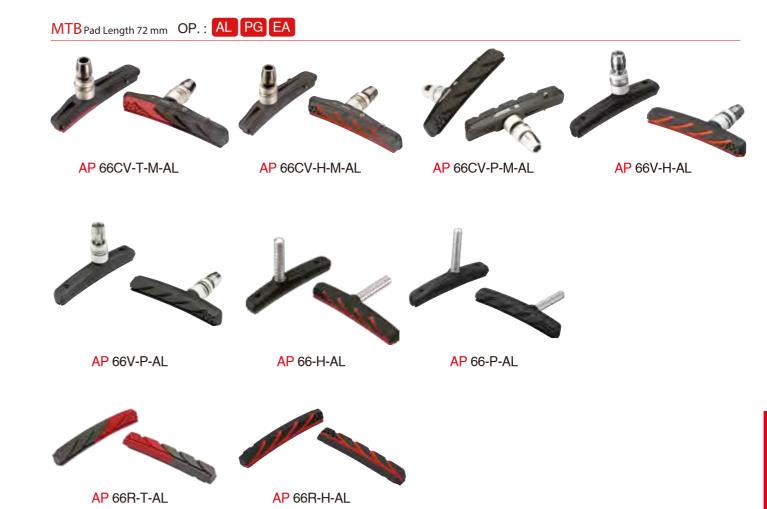

ADVANCED RANGE-4FUN 68 For Ultimate off road performance(Pat.)


This pad represents the pinnacle of EBS technology; where not only has the braking surface been engineered but also the side profile has been specifically styled/shaped to significantly improve braking performance in the most aggressive of environments.




MTB Pad Length 72 mm OP. : AL PG



PRO RANGE 72 73 75 76







Features

- Elongated pad for superior braking
- ☐ Crud Clean: Cutting features & plough to remove the most stubborn of contaminates
- ☐ Water Clean: Prime rim surface ready for braking using improved grove technology
- ☐ Max Brake: Largest contact area centered on bolt axis for uniform surface pressure
- ☐ Rim Release: Anti-squeal design eliminates noise and the need to set "toe-in"

ROAD (Shimano-Standard Mount) Pad Length 65 mm OP.: CA PCac CA1 AL PG CE









ARS 72CR-P-HU-AL





ARS 72R-M-AL



ARS 72CR-M-HU-AL



ARS 72R-P-AL

ROAD (Campy) Pad Length 65 mm





RPMx: RUBBER PLASTIC MATRIX PADS Pat.




Features

□ Plastic/Rubber Matrix ☐ High strength engineering grade PA 66 40% GF used for pad/holder interface

Advantages

Superior fit between pad and holder. Rubber molding tolerance +/-0.3mm, Plastic molding tolerance +/- 0.05mm

- Vastly improved production stability. Rubber mold tool 60-80 cavities vs plastic 1 LH & 1 RH
- Ultra-stiff pad. Reduces compression of rubber giving more responsive better performing brakes Improved rider safety.
- Impossible to accidently remove pad from holder whilst removing / fitting wheels, unlike standard rubber pads
- Reduced weight
- Air-Flow cooling
- Wear-Dot Indication



73 AERO+RPMx

ARS 73CRx-P-A-PG

ROAD (Shimano) Pad Length 57 mm



ARS 73Rx-P-PG









ARS 73CRx-P-A-PCAC

ARS 73Rx-P-PCAC





75 Pad Length 54 mm

ALLOY SPECIFIC PADS: 75 Series Pads

Pro-G compound is made by multi natural materials, and having high coefficient of friction. This compound has the characteristic of water repellent, which can enhance the braking performance, especially in wet condition. Pro-G compound also shows the excellent heat resistance and extremely stable friction performance.

ARS 75R-P-PG ARC 75R-P-PG

CARBON SPECIFIC PADS: 75 Series Pads

"what works on alloy isn't always best for carbon"

After many years of developing compounds for a multitude of rim manufacturers we know pad requirements for Carbon are very different from those on Alloy rims; that's why their profiles must be different.

For carbon there are three primary driving forces; rim protection heat/wear, wet performance and pad wear. The pads must deliver maximum braking in all conditions whilst operating at the lowest temperature, and you don't want to be changing pads halfway through a race or rims every few stages! It's simple, the lower the operating temperature the lower the wear, hence our 75 series pads offer maximum contact but with sufficient channeling to ensure high wet braking performance. Generally wet performance on carbon is an issue, a dangerous issue. 90% of carbon pads sold may will protect your rims but they can't stop you when it matters in the wet. With alloy rims wet performance can be enhanced by pad profile but not so on carbon where it's solely down to compound. That's why Ashima developed Pro-Cac, which is used on all 75 series brake pads, to deliver wet performances on par with Alloy.



Shimano: ARS 75R-P-PCAC Campy: ARC 75R-P-PCAC Colour option is available

ROAD Pad Length 54 mm Shimano - Direct Mount OP.: CA PCac CA1 AL PG CE



ARS 75CR-P-B-PCAC

Shimano - Standard Mount Pad Length 54 mm



ARS 75CR-P-HU-PCAC









Campy Pad Length 54 mm



ARC 75CR-P-HU-PCAC **ARS** 75CR-P-H-PCAC

ARC 75CR-P-H-PCAC





46 76 for Wide Rims 23-28mm Pad Length 54 mm OP. : CA PCac CA1 AL PG CE

CARBON SPECIFIC PADS FOR WIDER RIMS:

"76 Series pads are not only thinner for wider rims, but also compatible with both Shimano and Campagnolo"

The wider carbon rims are getting more popular nowadays. In order to maintain the braking feeling for riders who are using wider rims, Ashima now has the thinner pads for the rim width over 23mm. Another main feature of these pads is that they are compatible with Shimano system, as well as Campagnolo system. Ashima improves product quality by increasing the riding performance, also enhancing the convenience of use.




AR 46R-P-AL





HOSE & CABLE HYDRAULIC HOSE





Kevlar Jacket

Nylon 12 Hard Coat

Nylon 12 Core

Tenacity Polyester Yard

OUTER CASING: OC5 OD=5.4mm ID=2.5mm OC51 OD=5.0mm ID=2.3mm OC52 OD=5.0mm ID=2.1mm

Construction:

- ☐ Nylon 12 Core
- ☐ Double Braided
- ☐ Kevlar Jacket
- ☐ Strong Fiber Over Braid
- ☐ Tenacity Polyester Yard Spiral Wrap
- ☐ Transparent Nylon 12 Hard Coat

Advantages:

- ☐ Ultra-low expansion for improved feel
- ☐ Minimal fluid drag for responsive braking
- ☐ Maximum burst strength
- ☐ Max Strength to Weight Ratio
- ☐ Ultra-light weight
- ☐ High tear resistance
- ☐ High flexibility
- ☐ Exceptional Aesthetics

OUTER CASING: OC5 OD=5.4mm ID=2.5mm

OC51 OD=5.0mm ID=2.3mm OC52 OD=5.0mm ID=2.1mm

- Construction: □ Nylon 12 Core
- ☐ Tenacity Polyester Yard Spiral Wrap
- ☐ Kevlar Braided
- ☐ Nylon 12 Hard Coat

Advantages:

- ☐ Low expansion for positive feel
- ☐ Minimal fluid drag for responsive braking
- ☐ Excellent Strength to Weight Ratio ☐ Ultra-light weight
- ☐ High tear resistance
- ☐ High flexibility

Hydraulio	gth=30M)	
AH-MB-OC5-WS-XX	OD = 5.4mm, ID = 2.5mm	XX = Color Code: WH
AH-MB-OC51-WS-XX	OD = 5.0mm, ID = 2.3mm	BK BU BD
AH-MB-OC52-WS-XX	OD = 5.0mm, ID = 2.1mm	YL (Solid Color)



HOSE: KIT BOX

reaction Action	RH-OC5-H-KB-XX AH-OC5-H-KB-XX	RH-OC5-T-KB-XX AH-OC5-T-KB-XX	RH-OC51-S-KB-XX AH-OC51-S-KB-XX	RH-OC51-F-KB-XX AH-OC51-F-KB-XX
Dimension		=5.4 =2.5	OD=5 ID=2	
Accessories Kit	9999	9999	99999	99110000 99110000
Compatible Models	Hayes Dyno Sport / Comp; Prime Sport; Radar; Stroker Ryde	Tektro Auriga Comp / Comp WS; Draco / WS / 2; Gemini	Shimano XTR M975; Deore XT M775; SLX M665; Deore LX T665 / M585; Hone M601; Deore T615 / M595 / M535 / M525; Alfine S500 / S501; Metrea U5000; Alivio M4050; Acrea M3050; Non-Series T605 / MT520 / MT500 / MT501 / MT420 / MT400 / MT200 / M575 / M486 / M485 / M447 / M446 / M445 / M401 / M400 / M395 / M365 / M355 / M315 / M201 / M200 / UR300	Formula R1R; R1; R0; RX; T1; Mega

reaction Action	RH-OC52-M-KB-XX	RH-OC52-A-KB-XX	RH-OC52-R-KB-XX	RH-OC52-S90-KB-XX
	AH-OC52-M-KB-XX	AH-OC52-A-KB-XX	AH-OC52-R-KB-XX	AH-OC52-S90-KB-XX
Dimension		OD:	=5.0	
Accessories	88440000	4444	4444	9999
Kit	88440000		00004444	88861111
Compatible Models	Magura MT Trail; MT 8/7/6/5/4	Avid Juicy 3 / 3.5; Code COD2008~2010 / 5 / 7 / R 2011; Elixir 1 / 3; DB 2016 1 / 3; Red 22	SRAM Guide 2017 Ultimate / RSC / RS / RE / R; Level TLM & TL / Ultimate; CODE 2018 R. RSC"	Shimano (BH90) XTR (M9120 / M9100 / M9020 / M9000); Saint M820; Deore XT (M8120 / M8100 / M8020 / M8000); SLX (M7120 / M7100); Zee M640; Deore M6000


















INNER WIRE: HEADER CARD

Ashima inner wires are can be identified by the clear code designation that is on each and every cable end nipple, so there can be no confusion about the use.

	Market	ASHIMA CODE LH		OEM System Manufacture			
				Shimano	Campagnolo	Universal	
				Ashima Code RH			
	Road	AR	Brake	SB	СВ	-	
	MTB	AM	Brake	-	-	UB	
	Universal	AU	Derailleur	SG	CG	-	















PRO PTFE COATING WIRES

Ashima Reaction+ Pro PTFE Coating Wires provide initial pre-stretching to avoid re-adjusting the inner length after using.

This wire serves up corrosion resistance and weather resistance, especially smooth low friction and crisp stopping power under all conditions.

☐ Campagnolo/Shimano/ Universal end fittings



INNED WIDE

INNER WIRE	
Stainless Steel	☐ Slick, 19 x Strands
	☐ Increased environmental protection
	☐ Reduced weight
Slick	☐ Pre stretched to ensure 1 set-up
	☐ Surface smoothed for improved efficiency
Pro PTFE coated	☐ Initial Pre-stretched, Ultra slick.
	☐ Ultra low friction surface for improved efficiency
	☐ Hard wearing for endurance/life
Universal	☐ Increased environmental protection
	☐ Excellent corrosion resistance, acid, alkali resistance
	and weather resistance.

DERAILLEUR END NIPPLE **BRAKE WIRE END NIPPLE** SHIMANO SHIMANO ROAD CAMPY. CAMPY. ROAD MTB UNIVERSAL

32



ReAction+ is Ashima's premier derailleur offering delivering smooth, precise, effortless shifting. What is Nano Coating? Nano coating is a process where PTFE is added to plasma, which is then sprayed on the surface of the wire bundle. The result is a super fine coating (1000x finer than the thickness of a human hair) that penetrates deep into the wire strands rendering the surface super slick, with lowest friction possible and incidentally, also water repellent. In short it delivers cables with the best efficiency possible.

INNER WIRE

Stainless Steel	☐ Slick, 19 x Strands	WIIII) recovered
	☐ Increased environmental protection	DERAILLEUR
Slick	□ Reduced weight□ Pre stretched to ensure 1 set-up	END NIPPLE
	☐ Surface smoothed for improved efficiency	<u> </u>
Nano PTFE coated	$\hfill\square$ Ultra low friction surface for improved efficiency	SHIMANO
	☐ Hard wearing for endurance/life	@
	☐ Increased environmental protection	CAMPY.
Universal	☐ Campagnolo/Shimano/ Universal end fittings	5
		Double Headed



ReAction is designed to offer Elite levels of performance

OUTER CASING: SP (Brake & Derailleur)



DERAILLEUR

END NIPPLE

SHIMANO

CAMPY.

INNER WIRE

INNER WIRE		
Stainless Steel	☐ Slick, 19 x Strands	William .
	☐ Increased environmental protection ☐ Reduced weight	BRAKE WIRE END NIPPLE
Slick	☐ Pre stretched to ensure 1 set-up ☐ Surface smoothed for improved efficiency	0
PTFE coated	☐ Initial Pre-stretched, Ultra slick. ☐ Ultra low friction surface for improved efficiency	SHIMANO ROAD
Universal	☐ Hard wearing for endurance/life ☐ Increased environmental protection	CAMPY. ROAD
	☐ Excellent corrosion resistance, acid, alkali resistance and weather resistance.	MTB UNIVERSAL

☐ Campagnolo/Shimano/ Universal end fittings



Action+ is the mid-range offering that is comparable to Ashima's competitors premier aftermarket products. The inner/outer casing combination has been designed to offer Professional levels of performance but with reduced features when compared to ReAction. This range is targeted at competition riders that only want to limit their budget.



OUTER CASING: 2P(Brake) SP(Derailleur)

□Ø5, 0.6 x 1.6mm Flat Wrap	
□Ø5 & Ø4.5, 17 x Ø4.8 Strand wires	,
☐ High strength, reduced compression	
☐ High strength brake outer	
☐ High tech aesthetics	
□Ultra low friction surface for improved efficiency	
☐ Hard wearing for endurance/life	
□Exceptional aesthetics	
☐Slick, 19 x Strands	
☐Increased environmental protection	
☐Reduced weight	
Pre stretched to ensure 1 set-up	
Surface smoothed for improved efficiency	
☐ Campagnolo/Shimano/ Universal end fittings	
	□Ø5 & Ø4.5, 17 x Ø4.8 Strand wires □High strength, reduced compression □High strength brake outer □High tech aesthetics □Ultra low friction surface for improved efficiency □Hard wearing for endurance/life □Exceptional aesthetics □Slick, 19 x Strands □Increased environmental protection □Reduced weight □Pre stretched to ensure 1 set-up □Surface smoothed for improved efficiency





-	
BRAKE WIRE END NIPPLE	DERAILLEUR END NIPPLE
-	
SHIMANO ROAD	SHIMANO
Res	
CAMPY. ROAD	CAMPY.
MTB UNIVERSAL	



Action range has been developed to satisfy the needs of those riders who are more budget conscious but won't compromise on quality or durability.

OUTER CASING: 2P (Brake) SP(Derailleur)

2P High Strength Steel □Ø5, 0.6 x 1.6mm Flat Wrap

SP High Strength Steel	\square Ø5mm & Ø4.2, 17 x Ø4.8 Strand wires
POM Liner	$\hfill\square$ Low friction surface for improved efficiency
	\square Hard wearing for endurance/life
Colored Outer	☐ Color match components/frame
INNER WIRE	
Steel Cable	☐ 19 x Ø0.24, 19 x Strands
	☐ Increased strength
Galvanized	\square Reduced friction surface for improved efficiency
	☐ Environmental protection
Universal	☐ Campagnolo/Shimano Compatible end fittings





BRAKE WIRE DERAILLEUR END NIPPLE END NIPPLE

Sec.
SHIMANO ROAD
8=
CAMPY, ROAD

SHIMANO

CAMPY.



INNER WIRE SINGLE

RANGE	MARKET	USE	WIRE DIA (mm)	LENGTH (mm)	END-FITTING	Finish/ Material	Quantity	ASHIMA No.
	Universal	Derailleur	1.1	2100	Shimano			RPM-UDS-IN-HC
	Universal	Derailleur	1.1	2100	Campagnolo			RPM-UDC-IN-HC
<u>re∧ction</u> * Pro PTFE	Road	Brake	1.5	1700	Shimano	Stainless Steel Slick Pro PTFE coated	1 wire	RPM-PBS-IN-HC
	Road	Brake	1.5	1700	Campagnolo			RPM-RBC-IN-HC
	MTB	Brake	1.5	1700	MTB Universal			RPM-MB-IN-HC
reaction ⁺	Universal	Derailleur	1.1	2200	Shimano / Campagnolo	Stainless Steel Slick PTFE Nano coated	1 wire	RPM-UDU-IN-HC
	Universal	Derailleur		2100	Shimano			RM-UDS-IN-HC
		Tandem/Derailleur	1.1	3100				RM-TUDS-IN-HC
		Derailleur Tandem/Derailleur		2100	Campagnolo			RM-UDC-IN-HC
<u>rexction</u>	Road	Brake		3100 1700		Slick & PTFE Coated / Stainless Steel	1 wire	RM-TUDC-IN-HC RM-RBS-IN-HC
TEALLION		Tandem/Brake		3500	Shimano			RM-TRBS-IN-HC
		Brake	4.5	1700				RM-RBC-IN-HC
		Tandem/Brake	1.5	3500	Campagnolo			RM-TRBC-IN-HC
	MTB	Brake		1700	MTB			RM-MB-IN-HC
	WILD	Tandem/Brake		3500	Universal			RM-TMB-IN-HC
		Derailleur		2100	Shimano			APM-UDS-IN-HC
	Universal	Tandem/Derailleur Derailleur	1.1	3100 2100				APM-TUDS-IN-HC APM-UDC-IN-HC
		Tandem/Derailleur			Campagnolo			APM-TUDC-IN-HC
		Brake		3100 1700		Slick		APM-RBS-IN-HC
<u>vction</u> +		Tandem/Brake		3500	Shimano	/Stainless	1 wire	APM-TRBS-IN-HC
	Road	Brake		1700		Steel		APM-RBC-IN-HC
		Tandem/Brake	1.5	3500	Campagnolo			APM-TRBC-IN-HC
	MTD	Brake		1700	MTB			APM-MB-IN-HC
	MTB	Tandem/Brake		3500	Universal			APM-TMB-IN-HC
		Derailleur		2100	Shimano			AM-UDS-IN-HC
	Universal	Tandem/Derailleur	1.1	3100	Gillilail0			AM-TUDS-IN-HC
	Jiiveisai	Derailleur	1.1	2100	Campagnolo			AM-UDC-IN-HC
		Tandem/Derailleur		3100	p			AM-TUDC-IN-HC
<u>Action</u>		Brake		1700	Shimano	Slick	1 wire	AM-RBS-IN-HC
	Road	Tandem/Brake		3500		/Galvanized		AM-TRBS-IN-HC
		Brake Tandem/Brake	1.5	1700 3500	Campagnolo			AM-RBC-IN-HC
		Brake		1700	MTD			AM-TRBC-IN-HC AM-MB-IN-HC
	MTB	Tandem/Brake		3500	MTB Universal			AM-TMB-IN-HC

INNER WIRE: WORK-SHOP BOX



RANGE	MARKET	USE	WIRE DIA (mm)	LENGTH (mm)	END-FITTING	Finish/ Material	Universal	ASHIMA No.
	Universal	Derailleur	1.1	2100	Shimano			RM-UDS-IN-WS
	Universal	Derailleur	1.1	2100	Campagnolo	Slick & PTFE		RM-UDC-IN-WS
rexction	Dood				Shimano	Coated / Stainless	50 wires	RM-RBS-IN-WS
	Road	Brake	1.5	1700	Campagnolo	Steel		RM-RBC-IN-WS
	MTB				MTB Universal			RM-MB-IN-WS
	Universal	Derailleur	1.1	2100	Shimano	-		APM-UDS-IN-WS
	Universal		1.1	2100	Campagnolo			APM-UDC-IN-WS
<u>\(\rho \text{tion} \tau^+\)</u>	Road				Shimano	Slick /Stainless Steel	100 wires	APM-RBS-IN-WS
		Brake	1.5	1700	Campagnolo			APM-RBC-IN-WS
	MTB				MTB Universal			APM-MB-IN-WS
	Universal	Derailleur	1.2	2100	Shimano			AM-UDS-IN-WS
	Universal	Derailleur	1.2	2100	Campagnolo			AM-UDC-IN-WS
<u>Action</u>	Road				Shimano	No Slick /Galvanized	100 wires	AM-RBS-IN-WS
	Hoad	Brake	1.5	1700	Campagnolo			AM-RBC-IN-WS
	MTB				MTB Universal			AM-MB-IN-WS

OUTER CASING: WORK-SHOP BOX







RANGE	MARKET	USE	TYPE	OD (mm)	Quantity LENGTH (M)	ASHIMA No.	
rexction	Road	Derailleur	SP	4.5	25	RM-RD-OC4-WS-XX	
reaction	MTB/Road	Brake/Derailleur	55	5	25	RM-UU-OC5-WS-XX	
	MTB/Road	Brake	2P	5		APM-UB-OC5-WS-XX	
<u>^ction</u> +	Road	Derailleur	CD.	4.5	50	APM-RD-OC4-WS-XX	
	MTB	Brake/Derailleur	SP	55	5		APM-MU-OC5-WS-XX
	MTB/Road	Brake	2P	5		AM-UB-OC5-WS-XX	
<u>Action</u>	Road	Derailleur	SP	4.2	50	AM-RD-OC4-WS-XX	
	MTB	Derailleur	35	5		AM-MD-OC5-WS-XX	

Colour Code for ReAction Range SI BK RD BU GD
Colour Code for Action+ & Action Range WH BK RD BU YL

OUTER CASING: ZIP BAG







RANGE	MARKET	USE	TYPE	OD (mm)	Quantity LENGTH (M)	ASHIMA No.
reaction	Road	Derailleur	SP	4.5	7.5	RM-RD-OC4-ZB-XX
<u>rexectori</u>	MTB/Road	Brake/Derailleur	35	5	7.5	RM-UU-OC5-ZB-XX
	MTB/Road	Brake	2P	5		APM-UB-OC5-ZB-XX
^ction+	Road	Derailleur	SP	4.5	7.5	APM-RD-OC4-ZB-XX
	MTB	Brake/Derailleur	J JF	5		APM-MU-OC5-ZB-XX
	MTB/Road	Brake	2P	5		AM-UB-OC5-ZB-XX
<u>Action</u>	Road	Derailleur	SP	4.2	7.5	AM-RD-OC4-ZB-XX
	MTB	Derailleur	35	5		AM-MD-OC5-ZB-XX

Colour Code for ReAction Range SI BK RD BU GD

Colour Code for Action+ & Action Range WH BK RD BU YL

OUTER CASING: KIT BOX







DANOE	MARKET	USF	OUTER	OUT	OUT.	WIRE	WIRE LENGTH	END NIDDLE	Ferrule Plus+	Plus+	Ferrule	Ferrule	Donut	Cable	Rain	Liner	A OLUBA A N.													
RANGE	IVIARKET	USE	CON.	DIA (mm)	(M)	(mm)	(mm)	END NIPPLE	Nosed	Plain	DCL.	Basic	Donut	tips	Boot	(mm)	ASHIMA No.													
	MTB							Universal	2x	4x			Зх	2x	2x	650	RM-MB-K1-KB-XX													
		Brake		5	2.5	1.5	1350 / 2350	Shimano	2x	2x	2x		Зх	2x		650	RM-RBS-K1-KB-XX													
<u>reaction</u>	Road		SP					Campagnolo	2x	2x	2x		Зх	2x		650	RM-RBC-K1-KB-XX													
	Universal	Derailleur		4.5	1.8	1.1	1500 / 2100	Shimano	6x	4x			6x	2x		2100	RM-UDS-K1-KB-XX													
	Universal Derailleu	Derailleur		4.5	1.8	1.1	1500 / 2100	Campagnolo	6x	4x			6x	2x		2100	RM-UDC-K1-KB-XX													
	MTB		2P							Universal	2x	4x			Зх	2x	2x	650	APM-MB-K1-KB-XX											
		Brake 2F		5	2.5	1.5	1350 / 2350	Shimano	2x	2x	2x		Зх	2x		650	APM-RBS-K1-KB-XX													
<u>vction</u> +	Road																		Campagnolo	2x	2x	2x		Зх	2x		650	APM-RBC-K1-KB-XX		
	Universal	Derailleur	SP	SP	SP	SP	S.D.	ep.	S.D.	S.D.	S.D.	e D	e D	ep.	CD	CD	4.5	1.8	1.1	1500 / 0100	Shimano	6x	4x			6x	2x		2100	APM-UDS-K1-KB-XX
	Universal	Derailleur					4.5	1.0	1.1	1500 / 2100	Campagnolo	6x	4x			6x	2x		2100	APM-UDC-K1-KB-XX										
	MTB							Universal				6x	Зх	2x	2x	650	AM-MB-K1-KB-XX													
		Brake	2P	5	2.5	1.5	1350 / 2350	Shimano				6x	Зх	2x		650	AM-RBS-K1-KB-XX													
<u>Action</u>	Road							Campagnolo				6x	Зх	2x		650	AM-RBC-K1-KB-XX													
	Universal	Derailleur	SP	4.2	1.8	1.1	1500 / 2100	Shimano				8x	6x	2x		2100	AM-UDS-K1-KB-XX													
	Universal	Derallieur	58	4.2	1.8	1.1	1500 / 2100	Campagnolo				8x	6x	2x		2100	AM-UDC-K1-KB-XX													

Colour Code for ReAction Range SI BK RD BU GD Colour Code for Action + & Action Range WH BK RD BU YL


FERRULE TECHNOLOGY:



Plastic Ferrules

FerPlus+ ferrules incorporate many of the benefits and advantages offered by the FerFlex and FerStd Aluminum range but for the more economically sensitive user.

- ☐ Helix Molded outer profile allows sufficient flex to facilitate tighter cable routings
- ☐ Double Integral Seal design improves environmental protection
- ☐ Integral grips bite onto the outer for better retention
- $\hfill\square$ Brass insert prevents damage to ferrule from the outer wire/strands
- ☐ Inner wire seal ensures environmental protection and cable efficiency throughout life
- ☐ Free-Angle Nose improves cable routing/efficiency, articulation and environmental protection



HOUSING FERRULES

RANGE	PICTURE	ASHIMA ITEM NO. DESCRIPTION		QUANTITY	PACKAGING	
		APM-UB-FPPN-WB2	Brake Nosed		Work Shop Bottle C	
		APM-UB-FPP-WB1	Brake Plain			
<u>Action</u> †		APM-UD-FPPN-WB1	Gear 4.5 (braided outer) Nosed	100 pieces /		
		APM-UD-FPP-WB1	Gear 4.5 (braided outer) Plain	200 pieces	Work Shop Bottle A Work Shop Bottle B	
		APM-UD-FPPSN-WB1	Gear 4.0(std outer) Nosed			
		APM-UD-FPPS-WB1	Gear 4.0 (std outer) Plain			
		AM-UB-FB-WB	Brake	200 pieces	Work Shop Bottle A	
		AM-UD-FB-WB	Gear	200 pieces		
		AM-UB-FB-WB-XX	Brake	200 pieces	Work Shop Bottle A	
<u>Action</u>		AM-UD-FB-WB-XX	Gear	200 pieces	Work Shop Bottle A	
	A A	AM-UB-FPN-WB1	Brake Nosed			
		AM-UB-FP-WB1	Brake Plain	200 minor	Work Shop Bottle B	
		AM-UD-FPN-WB1	Gear Nosed	200 pieces		
		AM-UD-FP-WB1	Gear Plain			

XX-Color Code: BK BU RD GD SI , Mix color is available for Action+ & Action

NOODLE RANGE

RANGE	PICTURE	ASHIMA ITEM NO.	DESCRIPTION	QUANTITY	PACKAGING	
<u>^ction</u> +	V	APM-MB-NSK1-HB-XX	Sealed Noodle (90°+110°)+2 Rain Boots	1 004	Handar Dag Card	
<u>ALCION</u>	(II	APM-MB-NSK2-HB-XX	Sealed Noodle (90°+135°)+2 Rain Boots	1 set	Header Bag Card	
		AM-MB-NB1-PB	Noodle 90°			
		AM-MB-NB2-PB	Noodle 110°	100 pieces	Poly Bag	
	₫-	AM-MB-NB3-PB	Noodle 135°			
	2	AM-MB-NSBFK1-HB	Super Basic Plastic Noodle Kit+SUS Ferrule (90°+135°)+2 Rain Boots	1 set	Header Bag Card	
<u>Action</u>	Ü,	AM-MB-NSBF1-PB	Super Basic Plastic Noodle+ SUS Ferrule; 90°	100 minana	Doly Pog	
		AM-MB-NSBF3-PB	Super Basic Plastic Noodle+ SUS Ferrule; 135°	100 pieces	Poly Bag	
	10	AM-MB-NBK1-HB	Noodle 90°+ Rain Boot 6 Link 5mm	1 set	Hondor Pag Card	
	-	AM-MB-NBK2-H		Noodle 135°+ Rain Boot 6 Link 5mm	i set	Header Bag Card

CABLE TIE

CABLE NIPPLE

	100	AM-UD-EN1-WB	Fits 1.2mm cables&Smaller	500 pieces	Work Shop Bottle A		
Action	I ST	AM-UB-EN2-WB	Fits 1.5mm cables&Smaller	500 pieces			
<u>ACTION</u>		AM-UU-EN-WB-XX	500 pieces	Work Shop Bottle A			
XX = Color Code: BK BU RD GD SI , Mix color is available							

CABLE DONUT

	A A A	High End Dount Kit: RM-UU-DK-HC-XX		6 pieces	Header Card
reaction		RM-UD-D-WB-XX	High End Dount: Fits 1.1-1.2mm Derailleur cables	FO minana	Mark Chan Battle A
	∞ Ø,	RM-UB-D-WB-XX	High End Dount: Fits 1.5-1.6mm Brake cables	50 pieces	Work Shop Bottle A
<u>^ction</u> +		APM-UU-DKO-HB-XX	ID 4mm for Brake/ derailleur Cable	10 pieces	Header Card
		APM-UU-DKO-WB-XX	housing	100 pieces	Work Shop Bottle A
		APM-UU-DKI-HB-XX	ID 1.0mm for Brake/ derailleur Inner	10 pieces	Header Card
		APM-UU-DKI-WB-XX	Cable	100 pieces	Work Shop Bottle A
<u>Action</u>		AM-UD-D-WB-XX	Fits 1.1-1.2mm Derailleur cables Colour available: Black=BK, White=WH		Work Shop Bottle A
		AM-UB-D-WB-XX	Fits 1.5-1.6mm Brake cables Colour available: Black=BK, White=WH	600 pieces	

XX = Color Code for ReAction: BK BU RD GD SI

XX = Color Code for Action+: BK WH RD BU YL GR OR PK (TR) Mix color is available for Action+


37

GEAR-DOCTOR:



Features:

- ☐ Aluminum Cable Adjuster
- Extended inner thread provides extra stiffness to joint
- Rubber Sleeve to protect frame
- Ribbed for improved grip
- ☐ Fine Pitch aluminum adjuster threads
- Spring loaded to prevent self-adjustment
- Improved thread strength
- Improved sensitivity for precise control
- ☐ Fully sealed nosed ferrules
- Inner wire sealed
- Outer casing sealed
- Lined, preventing inner-wire rubbing aluminum components, improving cable efficiency
- Brass inserts prevent damage from outer casing stand wires

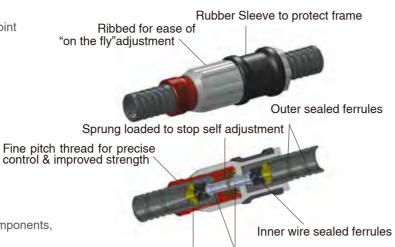

Brass inserted ferrules Lined Aluminum internals

Fine pitch thread for precise control & improved strength

■ MINI GEAR-DOCTOR



Features:

- ☐ Aluminum Cable Adjuster
- Extended inner thread provides extra stiffness to joint
- Ribbed for improved grip
- ☐ Fine Pitch aluminum adjuster threads
- Spring loaded to prevent self-adjustment
- Improved thread strength
- Improved sensitivity for precise control
- Brass inserts prevent damage from outer casing stand wires

Brass inserted ferrules

Outer sealed ferrules

Ribbed for ease of
"on the fly" adjustment

Inner wire sealed ferrules

Sprung loaded to stop

By removing the top and bottom sides of the rubber sleeve, it can be used in the brake cables.

RUBBER BOOT

RANGE	PICTURE	ASHIMA ITEM NO.	DESCRIPTION	QUANTITY	PACKAGING
	Salah Barana	AM-UB-BO1-WB2	Rubber Boot 6 Link 5MM		
<u> Action</u>	Service of the last of the las	AM-UB-BO2-WB2	Rubber Boot 9 Link 5MM	50 pieces	Work Shop Bottle C
	11	AM-UB-BO3-WB2	Rubber Boot square 5MM		

CABLE ADJUSTER

RANGE	PICTURE	ASHIMA ITEM NO.	DESCRIPTION	QUANTITY	PACKAGING
	Action Pilos	RM-UU-FGD-HC-XX Gear		2 pieces	Insert Card
<u>rexction</u>		RM-UU-FGD-WB2-XX	Outer	50 pieces	Work Shop Bottle C
<u>rexedon</u>		RM-UU-FGD1-HC-XX	Gear Adjuster for 4.0 Std Outer	2 pieces	Insert Card
		RM-UU-FGD1-WB2-XX	Gear Aujuster for 4.0 Std Outer	50 pieces	Work Shop Bottle C

DES

MINI GEAR DOCTOR

PICTURE

CRIPTION	QUANTITY	PACKAGING
ole adjuster, for	2 pieces	Insert Card

XX = Color Code: BK BU RD GD

AM-UU-MGD-HC-BK Universal cable adjuster, for brake and gear 2 pieces In

ASHIMA ITEM NO.

FRAME PROTECTOR

	RANGE	PICTURE	ASHIMA ITEM NO.	DESCRIPTION	QUANTITY	PACKAGING	
			AM-UD-FP-HB-XX	Frame Protection Tubes for Gear	8 pieces	Insert Card	
	Action	AM-UD-FP-WB1-XX	Cable Housing	30 pieces	Work Shop Bottle B		
			AM-UB-FP-HB-XX	Frame Protection Tubes for Brake	8 pieces	Insert Card	
			AM-UB-FP-WB1-XX	Cable Housing	30 pieces	Work Shop Bottle B	

XX = Color Code: BK WH OR

Mix color is avaliable for bottle package.

WORK SHOP BOTTLE: SIZE A,B,C



RITE TOOLZ

HYDRAULIC END FITTINGS

ASHIMA ASSEMBLY No	Photo	Name	Description	Shimano	Magura	Avid	Hayes	Formula	TekTro	SRAM
RT-SH-HEF-ST		Straight Connector Shimano	Compression Nut Bushing Insert	Х	-	-	-	-	-	-
RT-SH90-HEF-ST		Straight Connector Shimano (BH90)	Compression Nut Bushing Insert	Х	-	-	-	-	-	-
RT-SH90/1-HEF-ST		Straight Connector Shimano (BH90)	Compression Nut Bushing Insert	Х	-	-	-	-	-	-
RT-U1-HEF-BJ	1		Banjo Bolt Banjo Nut	Х	-	-	-	Х	-	-
RT-U2-HEF-BJ	0	Banjo Connector	Danjo	-	Х	Х	-	-	-	-
RT-U3-HEF-BJ	0	Bushing	-	-	-	Х	-	Х	-	
RT-U-HEF-ST		Straight Connector Avid / Magura	Compression Nut Bushing Insert	-	Х	Х	-	-	-	-
RT-U-HEF-SC		Straight	Convertor Housing Washer	-	X	X	-	-	-	-
RT-HS-HEF-SC	0=0=-===	Convertor	Compression Nut Bushing	-	-	-	Х	-	-	-
RT-HS-HEF-ST	← ∰ ™	Straight Connector Hayes	Compression nut Bushing Insert	-	-	-	Х	-	-	-
RT-FM-HEF-ST	→ ** **	Straight Connector Formula	Compression nut Bushing Insert	-	-	-	-	Х	-	-
RT-TK-HEF-ST	→ ∰ (Straight Connector TekTro	Compression nut Bushing Insert	-	-	-	-	-	X	-
RT-TK30-HEF-ST		Straight Connector TekTro	Compression nut Bushing Insert	-	-	-	-	-	Х	-
RT-SR-HEF-ST		Straight Connector SRAM	Compression nut Bushing Insert	-	-	-	-	-	-	X

HYDRAULIC BLEEDING ACCESSORIES:

Connector of Bleeding Kit

ASHIMA Item No.	Photo	Description
RT-BK-HS-LH-ST (M4-23)	8	Hayes (Lever End)
RT-BK-MG-LH-ST (M4-24)	S	Magura (Lever End)
RT-BK-U1-LC-ST (M4-25)	8	Shimano / Avid (Lever End) Shimano / Avid (Caliper End)
RT-BK-U2-LC-ST (M4-26)	8	Tektro (Lever End) Magura (Caliper End)
RT-BK-U-LC-SC (M4-27)	B	Compatible with most kinds of Bleeding Connector
RT-BK-PCD-LC-ST (M4-64)	60	ASHIMA PCD (Caliper End)
RT-BK-SR-CH-SC (M4-86)	P	SRAM (Caliper End)
RT-BK-U3-LC-ST (M4-87)	1	Shimano / Hayes / Tektro (Caliper End)



Work Shop Bottle B: 20 Sets Header Bag Card: 1 Set

HYDRAULIC END FITTINGS WORKSHOP BOX

Hydraulic end fittings for Avid, Shimano, Magura, Formula, Hayes, TekTro

TekTro	Hayes	Formula	Magura	Shimano	Avid
M4-47	M4-66	M4-67	M4-65	M4-03	M4-65
100	100	100	100	100	100
10PCS	10PCS	10PCS	10PCS	10PCS	10PCS
M4-46	M4-69	M4-68	M4-68	M4-68	M4-68
	00	00	00	000	00
10PCS	10PCS	10PCS	10PCS	10PCS	10PCS
M4-71	M4-71	M4-70	M4-70	M4-70	M4-70
馬の			景の		
10PCS	10PCS	10PCS	10PCS	10PCS	10PCS



RT-U-HEF-WS1

Hydraulic end fittings for ø5.0mm Hydraulic hose, applied to Avid, Shimano, Formula, Magura

	5.0 mm Hydraulic Hose								
M4-74	M4-54	M4-54 M4-68 M4-49 M4-72 M4-15							
H.C.	06		°\$-		53 50	- F			
20PCS	50PCS	20PCS	20PCS	20PCS	20PCS	20PCS			
M4-65 20PCS		M4-03 20PCS							
M4-67 20PCS	M4-70 20PCS	F3-30 10PCS	F3-50 10PCS	P8-07					



RT-U1-HEF-WS2

Hydraulic end fittings for ø5.4mm Hydraulic hose, applied to Hayes, TekTro

	5.4 mm Hydraulic Hose								
M4-74	M4-54	M4-54 M4-69 M4-52 M4-73 M4-55							
H.C.	8		*\$c.,		59/57	100			
15PCS	50PCS	20PCS	15PCS	20PCS	15PCS	20PCS			
M4-47 20PCS		RT-HC-U-2							
M4-71 20PCS	F3-30 10PCS	F3-50 10PCS	F8-07						



RT-U2-HEF-WS2

BLEEDING KIT BOX

Bleeding Kit for Avid, Shimano, Magura & Hayes


M4-33-1	M4-35	M4-23	
	-	(D)	
2PCS	1PCS	1PCS (Hayes)	
M4-24 / M4-26	M4-25	M4-36	
00	©	Ø9	
1PCS (Magura)	2PCS (Shimano/Avid)	Hose Lock2 PCS	





RT-BK-U-WS1

HYDRAULIC FITTINGS PRESS

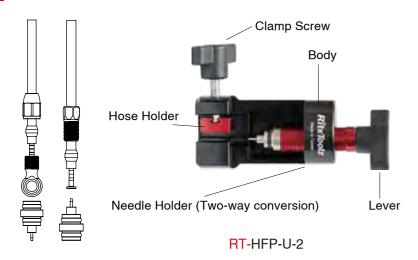

HYDRAULIC HOSE CUTTER

Portable hydraulic hose-cutting tool for quick, secure and precise cut. This hose cutter is specially design for non-leakage in order to using safety. Also be operated with one hand making it easy to cut. Moreover, the replacement blade set allows you to open up the cutter for quick and easy insertion

- ☐ Lever design for labour-saving cut.
- ☐ Cutter is suitable for hydraulic hose below Ø5.5 mm.
- ☐ Replacement blade set is available
- ☐ High-Quality Lightweight nylon handles, only 60.5 g.
- $\hfill\square$ Wire latch holds handles together when not in use.



Remark:

Ø5.0 x Ø2.1 : Avid, Sram, Magura Ø5.0 x Ø2.3 : Shimano, Formula Ø5.4 x Ø2.5 : Hayes, Tektro

RIDE TOOLS ORDER CODE

PICTURE	ITEM NO.	PRODUCT	
	RT-MT-U-M1	Multi Micro Tool	
	RT-MT-U-M2	Multi Macro Tool	
0	RT-SP-U-SW	SP-U-SW Spoke Wrench	
	RT-CR-U-1	Micro Chain Rivet Extractor Speed 8,9,10	
	RT-CR-U-2	Micro Chain Rivet Extractor Speed 11,12	
	RT-PP-U-1	Piston pad	
	RT-PP-U-2	Piston pad	
	RT-PP-U-3	Piston pad	
Effermenth)	AM-UU-CP1-ZB-BK	Chainstay protector	
101	RT-IRT-U-1	Internal routing tool	

WORKSHOP TOOLS ORDER CODE

PICTURE ITEM NO.		PRODUCT	
	RT-SP-U-HEX	Hex Wrench	
	RT-TW-U-TW	Torque Wrench	
	RT-TB-U-B2	BB External Center XL-AC03	
	RT-HEP-U-2	Hydraulic Fittings Press	

PICTURE	ITEM NO.	PRODUCT	
	RT-TB-U-B1	BB20 Tooth	
	RT-TB-U-CC	BB Campy	
	RT-HC-U-2	T-HC-U-2 Hydraulic Hose Cutter	
•	RT-HC-U-3.1 RT-HC-U-3.3	1 / 3 Piece Spare Blade for Hose Cutter	

HYDRAULIC ACCESSORIES ORDER CODE

PICTURE	ITEM NO.	PRODUCT	ACCESSORIES
The Front Park	RT-BK-PCD-M	PCD Mineral Oil Brake Fluid "Bleeding Kit"	M4-33-1 M4-64 x2 x2
The Points of the State of the	RT-BK-SH-M	Shimano bleeding kit	M4-33-1 M4-25 M4-87 x2 x2 x1
Mine Tholis	RT-BK-SHR-M	Shimano road bleeding kit	M4-33-1 M4-99 M4-87 x2 x1 x1
Note the state of	RT-BK-AV-M	Avid bleeding kit	M4-33-1 M4-25 x2 x2
S. S	RT-BK-SR-M	SRAM bleeding kit	M4-33-1 M4-25 M4-86 x2 x2 x1
The Property of the Parks of th	RT-BK-MG-M	Magura bleeding kit	M4-33-1 M4-24 M4-26 x2 x1 x1
Series Paris	RT-BK-HS-M	Hayes bleeding kit	M4-33-1 M4-23 M4-87 x2 x1 x1
Rife Tools	RT-BK-TK-M	TekTro bleeding kit	M4-33-1 M4-26 M4-87 x2 x2 x1

■ STEM CYCLE COMPUTER MOUNT

Two models of stem out front cycle computer bike mount Computer mount compatible with Garmin, Bryton, Wahoo







The underside adapter fitting GoPro camera attachment

RT-CMG-GM-ST1 RT-CMG-BT-ST1 RT-CMG-WH-ST1

■ ADJUSTABLE STEM CYCLE COMPUTER MOUNT

Two models of stem out front cycle computer bike mount Computer mount compatible with Garmin, Bryton, Wahoo





The underside adapter fitting GoPro camera attachment

RT-CMG-GM-AST RT-CMG-BT-AST RT-CMG-WH-AST

RT-CM-BT-AST RT-CM-WH-AST

RT-CM-GM-AST

HANDLEBAR UNDERSIDE CYCLE COMPUTER MOUNT

Two models of handlebar underside cycle computer bike mount Computer mount compatible with Garmin, Bryton, Wahoo



RT-CM-GM-RH RT-CM-BT-RH RT-CM-WH-RH



The underside adapter fitting GoPro camera attachment

RT-CMG-GM-RH RT-CMG-BT-RH RT-CMG-WH-RH